

HONDA

POWER EQUIPMENT



GENERATORS



Generators

Today, Honda generators are found hard at work around the world —from challenging remote locations to our very own harsh climate conditions found throughout Canada. Over 55 years of Power Equipment development and innovation by Honda engineers have given rise to a lengthy line of hard-working generators and applications built to suit your needs.

Trusted Performance

Honda Generators are powered by proven 4-stroke Honda engines that don't mix oil and gas. This offers many advantages, including clean and quiet operation, low ownership costs and low emissions.

CSA Approved

All Honda Generators purchased in Canada meet or exceed Canadian Standards Association (CSA) safety and Environmental Protection Agency (EPA) emissions standards.

Light & Compact

Our latest inverter generators are smaller, lighter and quieter than ever before. Many Honda generators produce voltage that is smoother and more consistent than commercially available power sources.

Dual-Voltage Selection

Honda high-output generators offer dual electrical standby power and are available in 4,000 to 10,000 watt models. The dual-voltage configuration allows you to power up appliances that require 120 or 240 volts.

Cold Climate Technology™

Available on all models, Honda Cold Climate Technology™ is specifically designed for cold Canadian climates. This standard-issued breather heater system helps prevent generator shutdown in freezing conditions, so you don't get left out in the cold.

Exceptional Warranty

Honda generators feature proven quality and reliability, along with a trusted warranty protection up to 36 months, and the support of a convenient Honda retailer network offering exceptional service.

Easy Operation

From intuitive features and ease-of-use to the carefully crafted reliability of portable power, all Honda generator controls are easily accessible and designed for ultimate convenience.

Super Quiet Operation

Honda Super Quiet portable generators feature exhaust and muffler technology engineered to lower noise ratings within the 48-60 dB(A) ranges, so you'll have to worry less about disturbing your neighbours — or your own peace and quiet.

Long Lasting Quality

Honda Generators are premium products offering rugged yet clever design with long lasting quality you can count on.

Power Sensitive Electronics

Honda was first to develop generators capable of powering sensitive electronics. Inverter technology regulates surges of raw power and smooths them out to the same high-quality electricity as the outlets in your home. The inverter models range from 1,000 to 7,000 watts to power everything from a laptop to a cottage.

The right wattage for the right amount of power

HOME


Application	Approximate wattage required for running	Approximate wattage required for starting
Coffee Maker	1,750	1,750
Dishwasher	1,450	1,800
Electric Fry Pan	1,300	1,300
Electric Range		
6 in. element	1,500	1,500
8 in. element	2,100	2,100
Microwave Oven, 625 watts	625	800
Toaster		
2-slice	1,050	1,050
4-slice	1,650	1,650
Electric Blanket (queen size)	800	800
Refrigerator or Freezer	700	2,200
20" Box Fan or Table Fan	120	180
Lights (as indicated on bulbs.)	(-)	(-)
Clothes Washer	1,150	2,300
Clothes Dryer		
Gas	700	1,800
Electric	5,750	1,800
Dehumidifier	650	800
Furnace Fan, gas or fuel oil		
0.125 hp	500	1,000
0.16 hp	750	1,500
0.25 hp	900	1,800
0.3 hp	1,000	1,800
0.5 hp	1,200	2,500
Sump Pump		
0.3 hp	750	1,500
0.5 hp	1,000	2,100
Hair Dryer	300 to 1,500	300 to 1,500
Clothes Iron	1,200	1,200
Room Air Conditioner - 10,000 BTU	1,500	2,200
Central Air Conditioner		
10,000 BTU	1,500	2,200
20,000 BTU	2,500	3,300
24,000 BTU	3,800	4,950
40,000 BTU	6,000	7,800
Radio	50 to 200	50 to 200
Television (colour)		
20 in. (LCD)	65	65
26 in. (LCD)	110	110
36 to 42 in. (Plasma)	250	250
50 to 60 in. (Plasma)	340	340
VCR/ DVD	35 to 50	35 to 50
Game Console	100	100
Laptop	50 to 75	50 to 75
Computer	150	150
Modem	25	25
Monitor		
Tube Type	200 to 250	200 to 250
LCD	30	30
Printer	100	100
RV Air Conditioner - 13,500 BTU	1,800	2,800
Vacuum Cleaner		
Upright	800	1,100
Canister	1,100	1,500
Garage Door Opener		
0.25 hp	550	1,100
0.3 hp	725	1,400

Note: Check your equipment or appliance for actual wattage requirement.

WORK

Application	Approximate wattage required for running	Approximate wattage required for starting
Air Compressor		
0.5 hp	1,000	2,000
1 hp	1,500	4,500
1.5 hp	2,200	6,000
2 hp	2,800	7,700
Bench Grinder		
6 in.	720	1,000
8 in.	1,400	2,500
10 in.	1,600	3,600
Electric Cultivator - 0.3 hp	700	1,400
Electric Hedge Trimmer - 18 in.	400	550
Electric Grass Trimmer	500	650
Drum Mixer - 0.25 hp	700	1,400
Flood Lights - Mercury Hallogen	1,000	1,000
Floor Polisher		
16 in. - 0.75 hp	1,400	3,100
20 in. - 1 hp	1,600	4,500
Power Hand Drill		
0.25 in.	350	350
0.375 in.	400	400
0.5 in.	600	600
Submersible		
Water Pump 400 gpm	200	400
Centrifugal. Type	500	650
Wet/ Dry Vacuum		
1.7 hp	900	900
2.5 hp	1,300	1,300
Saws		
Worm Drive (chop saw)	1,800	2,600
Band Saw	1,100	1,400
Circular Saw		
6.5 in.	800	1,200
7.25 in.	1,400	2,300
8.25 in.	1,800	3,000
Electric Chain Saw		
12 in. - 1.5 hp	900	1,100
14 in. - 2 hp	1,100	1,400
Table Saw		
1.7 hp	1,500	3,000
2.5 hp	1,800	4,500
Electric Welders		
70-amp	2,800	2,800
100-amp	3,600	3,600
200-amp	9,000	9,000
Kango Hammer	900	1,200
Farm Equipment		
Electric Fence (40 km/25 miles)	250	250
Stock Tank De-Icer	1,000	1,000
Grain Cleaner	650	1,000
Portable Conveyer - 0.5 hp	1,000	2,400
Grain Elevator - 0.75 hp	1,400	3,000
Milk Cooler	1,100	2,300
Mixer - 3.25 cubic feet, 0.75 hp	2,800	7,700
Milking Machine - 2 hp	1,000	2,300

Watts ÷ AMPS = Volts | Watts ÷ Volts = AMPS | Volts x AMPS = Watts

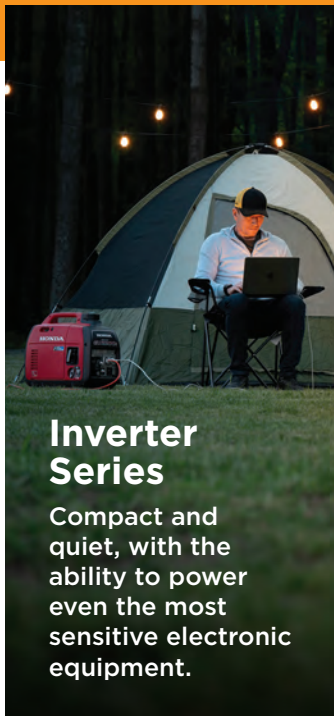

Inverter Series

Compact and quiet, with the ability to power even the most sensitive electronic equipment.



Ultra-Quiet 1000i

EU1000iTC3/C4

- Lightweight and portable 13 kg (28.7 lb).
- Recommended for TVs, lights, fans, small power tools and more.
- Inverter, stable power of 1,000 watts, at 120 VAC.
- Up to 3 hours of power at maximum rated output, up to 7 hours at 25% output on a tank of gas.
- Parallel-connect capability with another EU1000i.



Ultra-Quiet 2200i

EU2200iTC

- 2,200 watts of Honda inverter 120 VAC power.
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability.
- Whisper-quiet operation — 57 dB(A) at rated load, 48 dB(A) at 25% load.
- Easy to carry — 21.1 kg (46.5 lb).
- Double your power, connect it with a EU2200i Companion model for up to 4,400 watts maximum of power (3,600 watts rated).



Ultra-Quiet 2200i Companion

EU2200iTC1 Companion

- 2,200 watts of Honda inverter 120 VAC power.
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability.
- Easy to carry — 21.1 kg (46.5 lb).
- Double your power, connect it with a EU2200i model for up to 4,400 watts maximum of power (3,600 watts rated).



Ultra-Quiet 2200i GFCI

EB2200iTC

- 2,200 watts of Honda inverter 120 VAC power.
- Whisper-quiet operation — 57 dB(A) at rated load, 48 dB(A) at 25% load.
- Easy to carry — 21.1 kg (46.5 lb).
- GFCI Duplex Receptacle, Neutral Bonded.
- Ideal for jobsite applications, modern hot air furnaces, sensitive equipment and electronics.



Ultra-Quiet 3200i

EU3200iC

- All-new GX130cc engine.
- New Eco-Throttle switch for greater fuel efficiency.
- Lightweight and portable - only 27 kg (59.5 lb).
- Bluetooth capable technology allows you to monitor and control features.



Ultra-Quiet 3000i ES

EU3000iC4

- Powers most furnaces, fridges, microwaves, most 13,500 BTU/h RV AC units; great for RVing and more.
- Inverter — stable power of 3,000 watts, at 120 VAC.
- Up to 7.2 hours of power at maximum rated output, up to 20 hours at 25% output on a tank of gas.
- Electric start and back-up recoil start.







Ultra-Quiet 7000i ES

EU7000iC1

- Fuel injected — better fuel efficiency and lower maintenance.
- Inverter, stable power of 7,000 watts, at 120/240 VAC.
- Perfect for home and cottage back-up power, outdoor events and commercial worksites.
- Up to 6.5 hours of power at maximum rated output, up to 18 hours at 25% output on a tank of gas.
- Electric start and back-up recoil start.

Inverter Series Specifications

Specifications	Ultra-Quiet 1000i	Ultra-Quiet 2200i	Ultra-Quiet 2200i Companion	Ultra-Quiet 2200i GFCI	Ultra-Quiet 3200i	Ultra-Quiet 3000i ES	Ultra-Quiet 7000i ES
Model Code	EU1000iTC3/C4*	EU2200iTC*	EU2200iTC1 Companion†	EB2200iTC	EU3200iC	EU3000iES C4	EU7000iES C1
Generator Type	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Dual inverter
Maximum AC Output (Watts)	1,000	2,200	2,200	2,200	3,200	3,000	7,000
AC Voltage Available	120	120	120	120	120	120	120 / 240
Maximum Continuous AC Output (Watts)	900	1,800	1,800	1,800	2,600	2,800	5,500
Max. Rated AC Amperage @ 120 V / 240 V	7.5 / -	15 / -	15.0 / - (30.0 / - in parallel operation)	15.0 / -	21.7 / -	23.3 / -	45.8 / 22.9
Ground Fault Circuit Interrupter (GFCI)	N/A	N/A	N/A	Standard	N/A	N/A	N/A
Frequency (Hertz)	60	60	60	60	60	60	60
Automatic Voltage Regulator	Standard	Standard	Standard	Standard	Standard	Standard	PWM (Pulse Width Modulation)
DC Output Volts / Amps	12 / 6.5	12 / 8.3	N/A	N/A	N/A	12 / 8.3	N/A
Common Duplex Receptacle Specifications	7.5 amps/120 VAC continuous is available as combined total from these two AC receptacles.	15.0 amps/120 VAC continuous is available as combined total from these two AC receptacles.	N/A	15.0 amps/120 VAC continuous is available as combined total from these two AC GFCI receptacles.	21.7 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	23.3 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	40 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.
DC Receptacle Specifications	6.5 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A	N/A	N/A	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A
DC Charging Cable	Standard	Standard	N/A	N/A	N/A	Standard	N/A
High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications	N/A	N/A	This receptacle (NEMA # L5-30R) will supply 30.0 amps at 120 VAC continuously in parallel operation.	N/A	This receptacle (NEMA # L5-30R) will supply 23.3 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 23.3 amps at 120 VAC continuously.	This receptacle (NEMA # L14-30R) will supply 22.9 amps at 240 VAC and 45.8 amps at 120 VAC continuously.
	   						
		20T, OHC, -cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GX130 OHV, 4-stroke, air-cooled	Honda GX200T2 OHV, 4-stroke, air-cooled	Honda GX390T2 OHV, 4-stroke, air-cooled
Displacement	49.4 CC	121 CC	121 cc	121 cc	130 cc	196 cc	389 cc
Starting System	Manual recoil	Manual recoil	Manual recoil	Manual recoil	Recoil/full transistor	Electric/recoil	Electric/recoil
Low Level Oil Alert™ System	Standard	Standard	Standard	Standard	Standard	Standard	Standard (LED display)
Auto Throttle	Eco-Throttle™ standard	Eco-Throttle™ standard	Eco-Throttle™ standard	Eco-Throttle™ standard	Eco-Throttle™ standard	Eco-Throttle™ standard	Eco-Throttle™ standard
Remote Start Capability	No	No	No	No	No	No	Optional
Fuel Tank Capacity	2 litres (0.44 Imp. gal.)	3.6 litres (0.79 Imp. gal.)	3.6 litres (0.79 Imp. gal.)	3.6 litres (0.79 Imp. gal.)	4.6 litres (1.01 Imp. gal.)	13 litres (2.86 Imp. gal.)	19.2 litres (4.22 Imp. gal.)
Transport Wheels	N/A	N/A	N/A	N/A	N/A	Optional wheel kits: 4-wheels, same size; P/N 06423-ZS9-T30 4-wheels, large RR & front swivel/locking wheels: P/N 06424-ZS9-000AH 2-wheels with telescoping handles: P/N 06425-ZS9-020AH	2-wheel kit standard
Lifting Hook	N/A	N/A	N/A	N/A	N/A	N/A	Optional (P/N 06531-Z11- E00ZA)
Battery	N/A	N/A	N/A	N/A	N/A	Standard (P/N 31500-HNI-003AH)	Standard (P/N 31500-MCR-D02AH)
Approximate Running Time (hrs.) / Tankful	3** / 7***	3.2** / 8.1***	3.2** / 8.1***	3.2** / 8.1***	3.3** / 8.6***	7.2** / 20***	6.5** / 18 ***
Rated Fuel Consumption (litres/hr)	0.67**	1.14**	1.14**	1.14**	1.43**	1.78**	2.95**
Noise Level dB(A) (1.5 m to 7 m)	57** / 52***	57** / 48***	57** / 48***	57** / 48***	TBD	58** / 48***	60**
Length (Without Handles and Wheels)	451 mm (17.8 in.)	509 mm (20 in.)	509 mm (20.0 in.)	509 mm (20.0 in.)	571 mm (22.5 in.)	655 mm (25.8 in.)	N/A
Length (With Handles and Wheels)	N/A	N/A	N/A	N/A	N/A	N/A	1,198 mm (47.2 in.)
Width (Without Handles and Wheels)	242 mm (9.5 in.)	290 mm (11.4 in.)	290 mm (11.4 in.)	290 mm (11.4 in.)	306 mm (12.0 in.)	445 mm (17.5 in.)	539 mm (21.2 in.)
Width (With Handles and Wheels)	N/A	N/A	N/A	N/A	N/A	N/A	700 mm (27.6 in.)
Height (Without Lift-Hook)	379 mm (15 in.)	425 mm (16.7 in.)	425 mm (16.7 in.)	425 mm (16.7 in.)	452 mm (17.8 in.)	555 mm (21.9 in.)	721 mm (28.4 in.)
Height (With Lift-Hook)	N/A	N/A	N/A	N/A	N/A	N/A	821 mm (32.3 in.)
Dry Weight	13 kg (28.7 lb)	21.1 kg (46.5 lb)	21.1 kg (46.5 lb)	21.1 kg (46.5 lb)	27 kg (59 lb)	59 kg (130 lb)	118.1 kg (260.4 lb)
Cold Climate Technology™	Standard	Standard	Standard	Standard	Standard	Standard	Standard

*Two EU1000i units in parallel: 15 amps/120 volts continuous is available from the 20 amp T-slot receptacle. Note: 16.6 amps is available for approx. 30 min.

†Optional parallel operation cable (part number: 08E93-HPK-123HI) required. Maximum continuous output in parallel operation is 3600 watts or 30 amps @ 120 VAC. **At max. rated output (continuous) in Watts. ***At 25% rated output (continuous) in Watts.



Electric Start 5000

EM5000S3CT2

- Perfect for home backup or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up.
- 5,000 watts of power in dual-voltage configuration.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.



Electric Start 6500

EM6500S2CT2

- Perfect for home back-up or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up.
- 6,500 watts of power in dual-voltage configuration.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.



Commercial 5000 GFCI

EM5000S3CT2

- Designed for the rigours of daily commercial usage and rental applications.
- 5,000 watts of power in dual-voltage configuration with GFCI protection.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output.
- Hanger kit/lifting eye for easier moving around the job site.



Commercial 6500 GFCI

EB6500XC2

- Designed for the rigours of daily commercial usage and rental applications.
- 6,500 watts of power in dual-voltage configuration with GFCI protection.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output.
- Hanger kit/lifting eye for easier moving around the job site.



Commercial 10000 GFCI ES

EB10000C

- Designed for the rigours of daily industrial/commercial usage and rental applications.
- 10,000 watts of power in dual-voltage configuration with GFCI protection.
- Convenient 12 VDC electric start.
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance.
- 31-litre fuel tank provides up to 6.5 hours of continuous power at maximum rated output, or up to 8.5 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.
- Hanger kit/lifting eye, wheel kit with folding handle for easier moving around the job site.

Premium Series Specifications

Specifications	Electric Start 5000	Electric Start 6500	Commercial 5000 GFCI	Commercial 6500 GFCI	Commercial 10000 GFCI ES
Model Code	EM5000S3CT2	EM6500S2CT2	EB5000X3CT2	EB6500XCT2	EB10000C1
Generator Type	Brush type	Brush type	Brush type	Brush type	Brush type
Maximum AC Output (Watts)	5,000	6,500	5,000	6,500	10,000
AC Voltage Available	120 / 240	120 / 240	120 / 240	120 / 240	120 / 240
Maximum Continuous AC Output (Watts)	4,500 7,000 (iAVR)	5,500 7,000 (iAVR)	4,500 7,000 (iAVR)	5,500 7,000 (iAVR)	9,000
Max. Rated AC Amperage @ 120 V / 240 V	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)	37.5 x 2 (75) / 37.5
Ground Fault Circuit Interrupter (GFCI)	N/A	N/A	Standard	Standard	Standard
Frequency (Hertz)	60	60	60	60	60
Automatic Voltage Regulator	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard DAVR (Digital Automatic Voltage Regulator)
DC Output Volts / Amps	12 / 8	12 / 8	N/A	N/A	N/A
Common Duplex Receptacle Specifications	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 18.8 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.
DC Receptacle Specifications	8 amps/12 VDC is available from these +/- thumb screw terminals. Important Note: AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type.	8 amps/12 VDC is available from these +/- thumb screw terminals. Important Note: AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type.	N/A	N/A	N/A
DC Charging Cable	Optional (P/N 32650-825-015)	Optional (P/N 32650-825-015)	N/A	N/A	N/A
High Capacity 120, 120 / 240 VAC	This receptacle (NEMA # L5-30R)	This receptacle (NEMA # L5-30R) l supply 30 amps at 120 VAC tINUOUSLY. This receptacle (NEMA # L14-30R) will supply 22.9 amps 5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 30 amps at 120/240 VAC continuously. This receptacle (CS6364/5) will supply 37.5 amps (9 kVA) at 240 VAC or 50 amps (6 kVA) at 120 VAC continuously.

Engine Type	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda GX630H OHV, 90° V-Twin design, 4-stroke, air-cooled
Displacement	389 cc	389 cc	389 cc	389 cc	688 cc
Starting System	Electric/recoil	Electric/recoil	Manual recoil	Manual recoil	Electric
Low Level Oil Alert™ System	Standard	Standard	Standard	Standard	Standard
Auto Throttle	Standard	Standard	Standard	Standard	Standard
Remote Start Capability	Optional	Optional	No	No	No
Fuel Tank Capacity	23.5 litres (5.17 Imp. gal.)	23.5 litres (5.17 Imp. gal.)	23.5 litres (5.17 Imp. gal.)	23.5 litres (5.17 Imp. gal.)	31 litres (6.82 Imp. gal.)
Transport Wheels	2 Wheel standard	2 Wheel standard	2 Wheel standard	2 Wheel standard	2 Wheel standard
Lifting Hook	Optional (P/N 06810-Z22-A30ZA)	Optional (P/N 06810-Z22-A30ZA)	Standard	Standard	Standard
Battery	Standard (P/N 31500-MCR-J01)	Standard (P/N 31500-MCR-J01)	N/A	N/A	Standard
Approximate Running Time (hrs.) / Tankful	8.1** / 11.2****	6.9** / 10.4****	8.1** / 11.2****	6.9** / 10.4****	5.4** / 7.9****
Rated Fuel Consumption (litres/hr)	2.90**	3.40**	2.90**	3.40**	4.77**
Noise Level dB(A) (1.5 m to 7 m)	72**	73**	72**	73**	72**
Length (Without Handles and Wheels)	681 mm (26.8 in.)	681 mm (26.8 in.)	681 mm (26.8 in.)	681 mm (26.8 in.)	973 mm (38.3 in.)
Length (With Handles and Wheels)	1,043 mm (41.1 in.)	1,051 mm (41.4 in.)	1,043 mm (41.1 in.)	1,051 mm (41.4 in.)	1,420/1,041† mm (55.1/41† in.)
Width (Without Handles and Wheels)	530 mm (20.9 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)	552 mm (21.7 in.)
Width (With Handles and Wheels)	706 mm (27.8 in.)	706 mm (27.8 in.)	706 mm (27.8 in.)	706 mm (27.8 in.)	703 mm (27.7 in.)
Height (Without Lift-Hook)	719 mm (28.3 in.)	719 mm (28.3 in.)	719 mm (28.3 in.)	719 mm (28.3 in.)	695 mm (27.4 in.)
Height (With Lift-Hook)	773 mm (30.4 in.) optional lift hook	773 mm (30.4 in.) optional lift hook	773 mm (30.4 in.) standard	773 mm (30.4 in.) standard	891 mm (35.1 in.) standard
Dry Weight	102.2 kg (225.3 lb)	104.8 kg (231 lb)	94.6 kg (208.6 lb)	97.2 kg (214.3 lb)	183 kg (403.4 lb)
Cold Climate Technology™	Standard	Standard	Standard	Standard	Standard

At max. rated output (continuous) in Watts. ***At 25% rated output (continuous) in Watts. *At 50% rated output (continuous) in Watts. †Indicates handles in folded down position.*



[f Honda Canada Outdoors](#)
[@HondaPowersports-OutdoorCanada](#)
[@HondaOutdoors](#)

For optimum performance and safety, please read your owner's manual thoroughly before operating your Honda Power Equipment product. Specifications subject to change without notice. Models and colours may not be exactly as shown. Errors and omissions excepted. See your Honda Power Equipment retailer or honda.ca for full details. TMs - Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd.

Printed in Canada, 2024.

HONDA

POWER EQUIPMENT

powerequipment.honda.ca



1-800-RENT-CAT

BattlefieldEquipment.ca