

**HONDA**

**POWER EQUIPMENT**



**LAWN AND GARDEN**

# Why Honda



Reliability is built into every Honda. Designed for easy starts and quiet, efficient operation, Honda Power Equipment offers low maintenance and lasting performance.

## The Legacy of Honda

Honda's history has been built on pushing technological boundaries to ensure the best experience for customers — no matter which Honda product they choose. Honda has produced more than 100 million Power Equipment products worldwide, all thanks to legendary Honda durability, quality and reliability.

### Durability

Honda products are made to last. They are durable enough to withstand the elements or the demands of your job — from one season to the next.

### Quality

Honda has built a strong reputation on the quality of our products. You can be assured that the materials, functionality and practicality of the design are all made with quality in mind.

### Reliability

Our years of experience will provide you with the peace of mind that your Honda product has been engineered to be reliable and ready to perform — time and time again.



## Real Quality. Real Power Equipment.

Honda engineers have pushed boundaries in every category of Honda Power Equipment. Each defined by exclusive technologies designed to outperform the competition. It's 100% Honda quality, found only in 100% Honda Power Equipment.



### The Honda Retail Experience

Our Honda Power Equipment retailers are expertly trained to provide you with the highest level of Honda knowledge, service and support in finding the right Honda Power Equipment you need to get the job done.

Our experts will carefully assemble your product and show you how it works with a detailed demonstration upon purchase. Should you require it, our experts are also available to service and repair your Honda Power Equipment to our highest factory standards.

Find a Honda Power Equipment retailer near you at [powerequipment.honda.ca](http://powerequipment.honda.ca)

### Honda Plus Extended Warranty

With Honda Plus Extended Warranty, you can enjoy the added security of knowing qualifying repairs are covered with zero deductible. Honda Plus is also fully transferable under most conditions and ensures your product is repaired by qualified Honda technicians using high-quality Honda Genuine parts. Some restriction or exclusions apply. For more information on warranty, please visit your local retailer or [honda.ca](http://honda.ca).

**HONDA**

Plus

# Lawn Mowers

## THE NEXT GENERATION

All-new battery-powered lawn mowers,  
built to tackle any lawn with ease.



### HRN-BV

HRN21BVC4

- 1.5kW.
- 8 Ah battery & charger included.
- Smart-Drive™.
- 3-in-1 System.



### HRX-BV

HRX21BVC4

- 1.5kW.
- 8 Ah battery & charger included.
- Honda Select Drive®.
- 4-in-1 Versamow System.
- NeXite® deck.



### HRX-BE

HRX21BEC6

- 1.5kW.
- Honda e-Select Drive™.
- 4-in-1 Versamow System.
- NeXite® deck.
- Blade Stop System.
- Two battery bays with 12 Ah battery & charger included.

## PROFESSIONAL



### HRC-BE

HRC21BEC6

- 2.0kW.
- Electronic cruise control.
- Blade Stop System.
- Two battery bays with 12 Ah battery & charger included.

# Lawn Mower Specifications

Specifications	Residential	Premium Residential		Professional
	HRN-BV	HRX-BV	HRX-BE	HRC-BE
<b>Motor Type</b>	Brushless, Permanent Magnet	Brushless, Permanent Magnet	Brushless, Permanent Magnet	Brushless, Permanent Magnet
<b>Rated Power</b>	1.5kW	1.5kW	1.5kW	2.0kW
<b>Comparable to</b>	Honda GCV170	Honda GCV170	Honda GCV170	Honda GCV200
<b>Cutting Blade Speed</b>	2800 rpm	2800 rpm	2800 rpm	2800 rpm
<b>Blade Stop System</b>	N/A	N/A	Electronic transport with blade off	Electronic transport with blade off
<b>Cooling System</b>	Forced Air	Forced Air	Forced Air	Forced Air
<b>Maximum Battery Capacity</b>	0.6kWh/12Ah	0.6kWh/12Ah	1.2kWh/24Ah	1.2kWh/24Ah
<b>Battery Connection</b>	Spring loaded, locking, with Honda patented floating contacts	Spring loaded, locking, with Honda patented floating contacts	Spring loaded, locking, with Honda patented floating contacts	Spring loaded, locking, with Honda patented floating contacts
<b>Runtime*</b>	Up to 30 minutes (with included battery; up to 45 min. with optional 12Ah battery)	Up to 30 minutes (with included battery; up to 45 min. with optional 12Ah battery)	Up to 45 minutes (with included battery; up to 1.5 hours with optional second 12Ah battery)	Up to 45 minutes (with included battery; up to 1.5 hours with optional second 12Ah battery)
<b>Standard Battery/Charger†</b>	8Ah battery/2A charger (charges in 4.5 hr.)	8Ah battery/2A charger (charges in 4.5 hr.)	12Ah battery/2A charger (charges in <6 hr.)	12Ah battery/2A charger (charges in <6 hr.)
<b>Optional Rapid Charger</b>	8A	8A	8A	8A
<b>Drive System</b>	Variable Speed	Variable Speed	Electric (brushless motor)	High durability electric (sealed brushless motor)
<b>Ground Speed</b>	0-6.1 km/h	0-6.44 km/h	0-6.44 km/h	0-6.44 km/h
<b>Drive Type</b>	Rear Wheel	Rear Wheel	Rear Wheel	Rear Wheel
<b>Wheel Size</b>	8 in.	9 in.	9 in.	9 in.
<b>Deck Material</b>	Steel	Nexite®	Nexite®	Steel
<b>Deck Style</b>	Rear Bag	Rear Bag	Rear Bag	Rear Bag
<b>Cutting Width</b>	21 in.	21 in.	21 in.	21 in.
<b>Height Adjustment</b>	2-lever	2-lever	2-lever	4-lever
<b>Mowing Height Adjustments</b>	7	7	7	8
<b>Mowing Height Range</b>	1-4 in.	0.75-4 in.	0.75-4 in.	0.75-4 in.
<b>Cutting Modes</b>	3-in-1 System with Clip Director® Mulch, Bag, Rear Discharge	4-in-1 Versamow System with Clip Director® Mulch, Bag, Rear Discharge, Leaf Shred	4-in-1 Versamow System with Clip Director® Mulch, Bag, Rear Discharge, Leaf Shred	Mulch, Bag
<b>Handle</b>	Steel w/UL Certified Power Isolation	Steel w/UL Certified Power Isolation	Steel w/UL Certified Power Isolation	Steel w/UL Certified Power Isolation
<b>Drive Control</b>	Smart-Drive™	Honda Select Drive®	Honda e-Select Drive®	Electric Cruise Control
<b>Folds for Easy Storage</b>	Yes	Yes	Yes	No
<b>Adjustable Heights</b>	2-position	3-position	3-position	2-position
<b>Weight (without battery)</b>	36.6 kg/80.6 lbs.	38.4 kg/84.7 lbs.	41.3 kg/91 lbs.	48.5 kg/106.9 lbs.
<b>Cutting System</b>	MicroCut® Twin Blade	MicroCut® Twin Blade	MicroCut® Twin Blade	MicroCut® Twin Blade
<b>Grass Bag Capacity (Bushels)</b>	2.0	2.2	2.2	2.1

\* Depending on mowing conditions. † Based on maximum charging time.



## Batteries

Delivering durable, long-lasting power, Honda lawn mower batteries provide quiet, emission-free performance, reduced maintenance, and dependable run time for efficient, environmentally responsible lawn care.



### 8Ah Battery

DP5080CA

- Up to 30 minutes of run time.
- 4.5 hour charge time (reduced by 75% with optional Rapid Charger).
- Weighs just 2.7 kg.



### 12Ah Battery

DP50120CA

- Up to 45 minutes of run time.
- 6 hour charge time (reduced by 75% with optional Rapid Charger).
- Weighs just 4.0 kg.



## Chargers

Compact for easy storage, minimal footprint and portable for when you're on the move. Convenient lights show you when your charge is done.



### Standard Charger CV5020N1A


- 2A charging amperes.
- 4.5 hours charge time (8Ah battery).
- 6 hours charge time (12Ah battery).



### Rapid Charger CV5080N1A

- Up to 75% reduction in charge time on both 8Ah and 12Ah batteries compared to the standard charger.
- 8A charging amperes.

# Handhelds

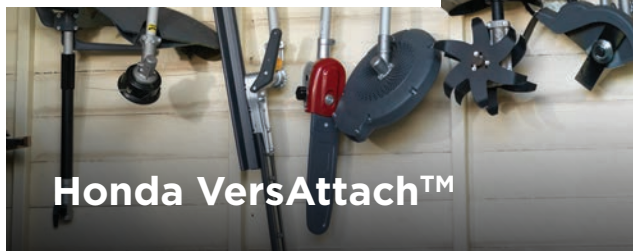

**Honda VersAttach™**

The Honda VersAttach™ is an innovative multifunction lawn and garden tool designed to simplify yard work and make life easier. The Honda VersAttach™ is a snap to use, easily connecting with up to nine interchangeable attachments to tackle residential and commercial landscaping tasks.



## Honda VersAttach™ Powerheads UMC425C/435C

- The efficiently engineered 25 cc powerhead (UMC425C) delivers efficient mini 4-stroke power to easily get the job done. Each Honda Powerhead is simple to start and use, quickly connecting to a variety of different lawn and garden tool attachments to suit your landscaping needs.
- The larger 35 cc mini 4-stroke powerhead (UMC435C) provides plenty of power to tackle your yard work with ease. Comfortable to use and simple to start, each Honda Powerhead delivers premium quality, reliability and performance with up to nine different lawn and garden tool attachments.

Specifications	Honda VersAttach™ 25 cc Powerhead	Honda VersAttach™ 35 cc Powerhead
<b>Model Code</b>	UMC425C	UMC435C
<b>Engine Type</b>	Honda GX25, mini 4-stroke, OHC, single cylinder air-cooled multi-position (360°)	Honda GX35, mini 4-stroke, OHC, single cylinder air-cooled multi-position (360°)
<b>Honda Engine Model</b>	GX25T	GX35T
<b>Displacement</b>	25 cc (1.53 CID)	35.8 cc (2.18 CID)
<b>Bore &amp; Stroke</b>	35 X 26 mm (1.4 X 1 in.)	39 X 30 mm (1.5 X 1.2 in.)
<b>Maximum Net Torque</b>	1.0 N.m (0.74 lbf-ft.) @ 5,000 RPM	1.6 N.m (1.20 lbf-ft.) @ 5,500 RPM
<b>Idle Speed</b>	3,100 ± 200 RPM	3,100 ± 200 RPM
<b>Max. No-Load RPM (Requires Blade Barrier)</b>	10,000 RPM	10,000 RPM
<b>Ignition System</b>	Transistorized magneto ignition (electronic)	Transistorized flywheel magneto (electronic)
<b>Spark Plug</b>	CMR5H (NGK)	CMR5H (NGK)
<b>Cooling System</b>	Forced air	Forced air
<b>Starting System</b>	Recoil starter	Recoil starter
<b>Stopping System</b>	Ignition primary circuit ground	Ignition primary circuit ground
<b>Carburetor</b>	Diaphragm type w/ fuel pump	Diaphragm type w/ fuel pump
<b>Recommended Fuel</b>	Regular unleaded gasoline (86 Octane or higher)	Regular unleaded gasoline (86 Octane or higher)
<b>Fuel Capacity</b>	0.53 L (18.7 fl. Imp. oz.)	0.63 litres (22.2 fl. Imp. oz.)
<b>Clutch Drive Type</b>	Centrifugal Twin Shoe-Clutch	Centrifugal Twin Shoe-Clutch
<b>Clutch Size</b>	54 mm (2.125 in.) Diameter	78 mm (3.0625 in.) Diameter
<b>Clutch Engagement</b>	4;200 ± 200 RPM	4;200 ± 200 RPM
<b>Air Cleaner</b>	Semi-dry type	Semi-dry type
<b>Lubrication System</b>	Oil mist	Oil mist
<b>Oil Capacity</b>	80 cc (2.82 fl. Imp. oz.)	100 cc (3.52 fl. Imp. oz.)
<b>Recommended Oil</b>	SAE 10W30 API service classification SJ or later	SAE 10W30 API service classification SJ or later
<b>Overall Length (without attachment)</b>	113.5 cm (44.7 in.)	114.5 cm (45.1 in.)
<b>Overall Width</b>	31.5 cm (12.4 in.)	32 cm (12.6 in.)
<b>Overall Height</b>	24.5 cm (9.6 in.)	25.5 cm (10 in.)
<b>Dry Weight (without attachment)</b>	5.1 kg (11.2 lb.)	6 kg (13.2 lb.)
<b>Handle Type</b>	Loop	Loop
<b>Throttle Control Type</b>	Two-motion trigger type	Two-motion trigger type
<b>Engine Stop Switch</b>	Slide type switch	Slide type switch
<b>Drive Shaft Type</b>	Rigid Steel	Rigid Steel
<b>Shaft Support</b>	Rubber Mounted Bushings (4)	Rubber Mounted Bushings (4)
<b>Main Pipe Diameter</b>	24 mm (0.94 in.)	26 mm (1.02 in.)
<b>Main Pipe Thickness / Material</b>	2 mm (0.08 in.) / Aluminum	2 mm (0.08 in.) / Aluminum
<b>Shoulder Harness</b>	Standard	Standard
<b>Safety Goggles (A.N.S.I Std.)</b>	N/A	N/A
<b>Blade Barrier Kit</b>	Standard	Standard



# Honda VersAttach™ Attachments



## Trimmer/Brush Cutter

SSBC

Combined with an easy-grip loop handle and durable 2-line bump-feed nylon cutter head, the trimmer/brush cutter makes light work of even the most stubborn of grass and weeds.

<b>Dimensions (LxWxH)</b>	72.5 x 31 x 20 cm (28.5 x 12.2 x 7.9 in.)
<b>Weight</b>	1.6 kg (3.5 lb.)
<b>Cutting Swatch</b>	42 cm (16.5 in.)
<b>Driveshaft Type</b>	Solid steel
<b>Maximum Spindle Speed</b>	6,900 RPM
<b>Head Type</b>	2-line bump-feed
<b>Trimmer Line Diameter</b>	2.7 mm (0.105 in.)
<b>Optional Accessories Kit</b>	255 mm (10 in.) steel 3-tooth grass blade kit, blade holder B: This part is required when installing any other trimmer head



## Blower

SSBL

High air speed up to 315 km/h\* and air volume up to 250 cfm\* provides powerful and targeted airflow parallel to the ground that easily keeps garden paths, driveways and lawns free of debris.

<b>Dimensions (LxWxH)</b>	86.5 x 28 x 16 cm (34 x 11 x 6.3 in.)
<b>Weight</b>	2.2 kg (4.85 lb.)
<b>Maximum Air Speed (km/h - mph)</b>	UMC425: 296 - 184 UMC435: 315 - 196
<b>Maximum Air Volume (CFM)</b>	UMC425: 235; UMC435: 250

\* UMC435



## Pruner<sup>†</sup>

SSPP

With a 30.5 cm (12 in.) guide bar and automatic oiler with flow rate adjustment, the pruner attachment is designed for trimming, pruning and cutting high branches.

<b>Dimensions (LxWxH)</b>	78.5 x 8.4 x 14 cm (30.9 x 3.3 x 5.5 in.)
<b>Weight</b>	1.7 kg (3.8 lb.) - Includes saw chain, guide bar & transportation guard
<b>Guide Bar Length</b>	30.5 cm (12 in.)
<b>Shaft Length</b>	635 mm (25 in.)
<b>Chain Type</b>	0.375 in. pitch x 0.050 in. gauge x 45 links (Honda part # 72511-VL6-013HE) or Oregon 91 Series (91VX-45E, 91VG-45E for repair)
<b>Sharpening File</b>	Round 4 mm (5/32 in.)



## Hedge Trimmers<sup>†</sup>

Short: SSSH-S | Long: SSSH-L

The short or long shaft articulating hedge trimmer attachment with a 55 cm (21.7 in.) double-sided and double-reciprocating blade helps keep your hedges, bushes and shrubs in shape.

<b>Dimensions (LxWxH)</b>	<b>S:</b> 89.5 x 12.4 x 12.4 cm (35.2 x 4.9 x 4.9 in.) <b>L:</b> 140 x 12.4 x 12.4 cm (55.1 x 4.9 x 4.9 in.)
<b>Weight</b>	<b>S:</b> 2.2 kg (4.8 lb.) <b>L:</b> 2.7 kg (6 lb.)
<b>Shaft Length</b>	<b>S:</b> 13.5 cm (5.3 in.) <b>L:</b> 63 cm (24.8 in.)
<b>Cutter Type</b>	Double-sided, double-reciprocating
<b>Blade Length</b>	55 cm (21.6 in.)
<b>Articulation</b>	18° angle increment
<b>Total Articulation Range</b>	108° (-54° - +54°)

## Extensions



Optional extension attachments provide extra reach with hedge or pruner trimmer attachment. Available in two sizes: SSESSC: 50 cm (19.7 in.), SSES LC: 1 m (39.4 in.).



## Cultivator

SSCL

With a tine diameter of 24 cm (9.4 in.), the cultivator makes tilling, aerating and the cultivation of garden plots, raised flower beds and lawns ideal, simple and stress-free.

<b>Dimensions (LxWxH)</b>	80 x 24.4 x 25.4 cm (31.5 x 9.6 x 10 in.)
<b>Weight</b>	3.3 kg (7.2 lb.)
<b>Tine Diameter</b>	24 cm (9.4 in.)
<b>Tilling Width</b>	16.6 cm (6.5 in.)
<b>Tine Speed</b>	233 RPM @ 10,000 RPM engine speed



## Edger

SSET

With a height-adjustable blade and lightweight ergonomic design, the edger is configured to safely operate and help ensure your sidewalk and beds are pristine.

<b>Dimensions (LxWxH)</b>	70 x 20 x 36 cm (27.5 x 7.9 x 14.2 in.)
<b>Weight</b>	1.9 kg (4.1 lb.)
<b>Blade Length</b>	20 cm (7.87 in.)



## PowerSweep

SSSWC

With a 60 cm (23.6 in.) wide sweeper the PowerSweep attachment cleans dirt and water off flat surfaces and moves pebbles and sand in turf.

<b>Dimensions (LxWxH)</b>	82.2 x 60 x 36.3 cm (32.3 x 23.6 x 14.3 in.)
<b>Weight</b>	7.2 kg (15.8 lbs.) - Includes deflector and shaft tube
<b>Roller Sweeper Diameter</b>	26.5 cm (10.4 in.)



## Bristle Brush

SSBRC

With a 60 cm (23.6 in.) wide brush the Bristle Brush attachment cleans dirt, leaves and waste off flat surfaces with crevices.

<b>Dimensions (LxWxH)</b>	81.4 x 60 x 36.3 cm (32 x 23.6 x 14.3 in.)
<b>Weight</b>	6.3 kg (13.8 lbs.) - Includes deflector and shaft tube
<b>Roller Brush Diameter</b>	25 cm (9.8 in.)

# Tillers



## Gardening

Honda Mid-Tine Tillers are perfect for small and medium gardening jobs.



### Mid-Tine 21"

F220

- Perfect for backyard flowerbeds, suburban vegetable gardens and at the cottage.
- 54.5 cm (21.5 in.) tilling width.
- Easy transportation with foldable handles and retractable front wheel.



### Mid-Tine 36" Multi-Drive

F501

- Perfect for demanding jobs around the yard.
- 91.4 cm (36 in.) tilling width and adjustable handlebar.
- 2 forward and 1 reverse speed.
- Narrow gear case for deeper tilling and retractable transport wheel.



## Ground Breaking

Honda Rear-tine Tillers are best for extra-large gardens or breaking up hard ground.



### Rear-Tine 20" ARS™

FR650

- Perfect for tilling hard or never-broken ground.
- Exclusive ARS™ Active Rotary System with two sets of counter-rotating tines efficiently till the soil with reduced pulling and kick back.
- 51 cm (20 in.) tilling width.
- 2 forward and 1 reverse speed.



### Rear-Tine 20" PRO

FRC800

- Designed specifically for rental stores and commercial users who are breaking new ground day after day.
- 50 cm (19.7 in.) tilling width.
- 3 forward and 1 reverse speed.
- Heavy-duty gear case, shift lever, tines and tine housing and wraparound steel bumper guard.

Specifications	Gardening		Ground Breaking	
	Mid-Tine 21"	Mid-Tine 36" Multi-Drive	Rear-Tine 20" ARS™	Rear-Tine 20" PRO
<b>Model Code</b>	F220K1CT2	F501HK8C2	FR650K1C1	FRC800K1C1
<b>Tiller Type</b>	Mid-tine	Mid-tine	Rear-tine ARS™ (Active Rotary System)	Rear-Tine
<b>Engine Type</b>	Honda GXV57, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder	Honda GX240T2, 4-stroke, OHV, single cylinder
<b>Honda Engine Model</b>	GXV57	GX160T2	GX160T2	GX240T2
<b>Displacement</b>	57 cc (3.5 CID)	163 cc (10 CID)	163 cc (10 CID)	270 cc (16.5 CID)
<b>Fuel Tank Capacity</b>	0.7 litres (24.6 fl. Imp. oz.)	2.5 litres (0.55 Imp. gal.)	2.8 litres (0.62 Imp. gal.)	4.4 litres (0.97 Imp. gal.)
<b>Recommended Fuel</b>	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)
<b>Starting System</b>	Recoil starter	Recoil starter	Recoil starter	Recoil starter
<b>Air Cleaner</b>	Dry paper type	Dry paper type	Dual-element type	Dual-element type w/ cyclone filter
<b>Transmission Type</b>	Gear drive	Chain drive	Chain drive	Chain drive
<b>Transmission Speed(s)</b>	1-forward	2-forward / 1-reverse	2-forward / 1-reverse	3-forward / 1-reverse
<b>Tilling Width</b>	54.5 cm (21.5 in.)	91.4 cm (36 in.)	51 cm (20.1 in.)	50 cm (19.7 in.)
<b>Tine Diameter</b>	28 cm (11 in.)	28 cm (11 in.)	32.6 cm (12.8 in.)	30 cm (11.8 in.)
<b>Tine Speed @ max. Torque Speed</b>	130 RPM	80/113 RPM	238 RPM	219 RPM
<b>Overall Length</b>	120 cm (47.2 in.)	132 cm (52 in.)	145 cm (57.1 in.)	166 cm (65.4 in.)
<b>Overall Height</b>	97.5 cm (38.4 in.)	99.5 cm (39.2 in.)	110 cm (43.3 in.)	124.5 cm (49 in.)
<b>Overall Width</b>	54.5 cm (21.5 in.)	95.5 cm (37.6 in.)	57 cm (22.4 in.)	61 cm (24 in.)
<b>Dry Weight</b>	22.5 kg (49.6 lbs.) without wheels	61 kg (134.5 lbs.) without wheels	87 kg (191.8 lbs.) without wheels	120 kg (264.6 lbs.) without wheels
<b>Folding Handle</b>	Standard	N/A	N/A	N/A
<b>3-Position Handle Adjustment</b>	Standard	Standard	N/A	N/A
<b>4-Position Handle Adjustment</b>	N/A	N/A	Standard	Standard
<b>Transport Wheels</b>	Standard	Standard	N/A	N/A
<b>Adjustable Depth Bar</b>	Standard	Standard	Standard	Standard

# Water Pumps

## Transfer

Transfer Pumps are designed for small to mid-sized jobs such as pool maintenance.



### Portable 1"

WX10TC1

- Very portable for pool maintenance, filling water tanks at the cottage and small drainage jobs.
- Lightweight and compact, only 6.1 kg (13.4 lb.).
- Moves up to 120 L (26.4 Imp. gal.) per minute through 25 mm (1 in.) suction and discharge ports (1" NPT- 0.75" garden hose adapter included).



### Portable 1.5"

WX15TCX1

- Very portable for pool maintenance, filling water tanks at the cottage and small drainage jobs.
- Lightweight and compact, only 9 kg (20 lb.).
- Moves up to 240 L (53 Imp. gal.) per minute through 38 mm (1.5 in.) suction and discharge ports.
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.



### Utility 2"

WB20XT4C

- Commercial-grade engine, high efficiency and heavy-duty cast iron impeller for more demanding tasks.
- Moves up to 620 L (136 Imp. gal.) per minute.
- Full-frame construction with anti-vibration mounting system.



### Utility 3"

WB30XT3C1

- Commercial-grade engine and heavy-duty, cast iron impeller for more demanding tasks.
- Moves up to 1,100 L (242 Imp. gal.) per minute through 80 mm (3.1 in.) suction and discharge ports.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.



## Construction

Clean up with Construction Series Pumps that have the ability to remove water containing small rocks and unwanted debris.



### Trash Pump 2" WT20XK4C

- Heavy-duty, deep-vane impeller and extra-thick, cast-aluminum pump housing.
- Moves up to 710 L (156 Imp. gal.) per minute through 50 mm (2 in.) suction and discharge ports.
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.

### Trash Pump 3" WT30XK4C



- Heavy-duty, deep-vane impeller and extra-thick, cast-aluminum pump housing.
- Moves up to 1,210 L (266 Imp. gal.) per minute through 80 mm (3 in.) suction and discharge ports.
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.



### Trash Pump 4" WT40XK3C

- Heavy-duty, deep-vane impeller and extra-thick, cast-aluminum pump housing.
- Moves up to 1,640 L (361 Imp. gal.) per minute through 100 mm (4 in.) suction and discharge ports.
- If oil drops below a safe operating level, the engine is designed to automatically shut down with Oil Alert™ System.
- Full-frame construction with anti-vibration mounting system helps prevent sinking into soft ground.

## High-Pressure

Advanced High-Pressure Pumps are capable of displacing water at greater pressures for irrigation, spraying and commercial use.



### High-Pressure 1.5"

WH15XT2C

- High-pressure pump that performs a multitude of duties, from water transfer to irrigation.
- Moves up to 400 L (88 Imp. gal.) per minute.
- Designed to use with a fire hose nozzle for spraying further distances or irrigation.
- Convenient carrying handle and hose strainer.



### High-Pressure 2"

WH20XTC

- Perform a multitude of duties, from water transfer to irrigation, with this commercial-grade, high-output, high-pressure pump.
- Moves up to 500 L (110 Imp. gal.) per minute through 50 mm (2 in.) suction and discharge ports, high pressure (61 psi).
- Designed to use with a fire hose nozzle for spraying further distances or irrigation.
- Convenient carrying handle and hose strainer.

# Pump Specifications

Specifications	Transfer			
	Portable 1"	Portable 1.5"	Utility 2"	Utility 3"
<b>Model Code</b>	WX10TC1	WX15TCX1	WB20XT4C	WB30XT3C1
<b>Pump Type</b>	Transfer	Transfer	De-watering, general purpose	De-watering, general purpose
<b>Pump</b>	Centrifugal	Centrifugal	Centrifugal	Centrifugal
<b>Type</b>	Self-priming	Self-priming	Self-priming	Self-priming
<b>Suction Port Diameter</b>	25.4 mm (1 in.)	38 mm (1.5 in.)	50 mm (2 in.)	80 mm (3 in.)
<b>Discharge Port Diameter</b>	25.4 mm (1 in.)	38 mm (1.5 in.)	50 mm (2 in.)	80 mm (3 in.)
<b>Litres Per Minute</b>	120	240	620	1,100
<b>Imp. Gal. Per Minute</b>	26.4	53	136	242
<b>Litres Per Hour</b>	7,200	14,400	37,200	66,000
<b>Imp. Gal. Per Hour</b>	1,584	3,180	8,160	14,520
<b>Total Head</b>	37 m (121 ft.)	40 m (130 ft.)	32 m (105.6 ft.)	23 m (75.9 ft.)
<b>Suction Head (Total Lift.)</b>	8 m (26 ft.)	8 m (26 ft.)	7.5 m (24.6 ft.)	7.5 m (24.6 ft.)
<b>Priming Time @ 5 m (16.4 ft.)</b>	80 seconds	110 seconds	110 seconds	150 seconds
<b>Pump Body</b>	Aluminum	Aluminum	Aluminum	Aluminum
<b>Impeller</b>	Aluminum	Aluminum	Cast iron	Cast iron
<b>Drive Unit Type</b>	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal
<b>Frame Type</b>	Handle type, steel base	Handle type, steel base	Full frame	Full frame
<b>Engine Type</b>	Honda GX25T, mini 4-stroke, OHC, single cylinder	Honda GXH50, 4-stroke, OHV, single cylinder	Honda GX120T2, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder
<b>Displacement</b>	25 cc (1.53 CID)	49 cc (2.99 CID)	118 cc (7.2 CID)	163 cc (9.95 CID)
<b>Lubrication System</b>	Controlled oil mist	Splash type	Forced spray	Forced spray
<b>Governor</b>	Mechanical	Mechanical	Mechanical centrifugal	Mechanical centrifugal
<b>Starting System</b>	Recoil starter	Recoil starter	Recoil starter	Recoil starter
<b>Fuel Tank Capacity</b>	0.53 litres (0.12 Imp. gal.)	1.2 litres (0.26 Imp. gal.)	2 litres (0.44 Imp. gal.)	3.1 litres (0.68 Imp. gal.)
<b>Oil Alert™ System</b>	N/A	Standard	Standard	Standard
<b>Length</b>	34 cm (13.4 in.)	32.5 cm (12.8 in.)	49 cm (19.3 in.)	51 cm (20.1 in.)
<b>Width</b>	22 cm (8.7 in.)	27.5 cm (10.8 in.)	36.5 cm (14.4 in.)	38.5 cm (15.2 in.)
<b>Height</b>	29.5 cm (11.6 in.)	37.5 cm (14.8 in.)	42 cm (16.5 in.)	45.5 cm (17.9 in.)
<b>Dry Weight</b>	6.1 kg (13.4 lb.)	9 kg (20 lb.)	20 kg (44.1 lb.)	26 kg (57.3 lb.)

# Pump Specifications

Specifications	Construction			High-Pressure	
	Trash Pump 2"	Trash Pump 3"	Trash Pump 4"	High-Pressure 1.5"	High-Pressure 2"
<b>Model Code</b>	WT20XK4C	WT30XK4C	WT40XK3C	WH15XT2C	WH20XTC
<b>Pump Type</b>	Trash	Trash	Trash	High pressure	High pressure
<b>Pump</b>	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal
<b>Type</b>	Self-priming	Self-priming	Self-priming	Self-priming	Self-priming
<b>Suction Port Diameter</b>	50 mm (2 in.)	80 mm (3 in.)	100 mm (4 in.)	40 mm (1.5 in.)	50 mm (2 in.)
<b>Discharge Port Diameter</b>	50 mm (2 in.)	80 mm (3 in.)	100 mm (4 in.)	40 mm (1.5 in.)	50 mm (2 in.)
<b>Litres Per Minute</b>	710	1,210	1,640	400	500
<b>Imp. Gal. Per Minute</b>	156	266	361	88	110
<b>Litres Per Hour</b>	42,600	72,600	98,400	24,000	30,000
<b>Imp. Gal. Per Hour</b>	9,360	15,960	21,660	5,280	6,600
<b>Total Head</b>	30 m (98 ft.)	27 m (89 ft.)	27 m (89 ft.)	39 m (127 ft.)	43 m (141 ft.)
<b>Suction Head (Total Lift.)</b>	8 m (26 ft.)	8 m (26 ft.)	8 m (26 ft.)	8 m (26 ft.)	8 m (26 ft.)
<b>Priming Time @ 5 m (16.4 ft.)</b>	60 seconds	90 seconds	150 seconds	80 seconds	80 seconds
<b>Pump Body</b>	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
<b>Impeller</b>	Conical cast iron	Conical cast iron	Conical cast iron	Cast iron	Cast iron
<b>Drive Unit Type</b>	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal	Direct couple/mechanical seal
<b>Frame Type</b>	Full frame	Full frame	Full frame	Handle type, steel base	Handle type, steel base
<b>Engine Type</b>	Honda GX160T2, 4-stroke, OHV, single cylinder	Honda GX270T2, 4-stroke, OHV, single cylinder	Honda GX390T2, 4-stroke, OHV, single cylinder	Honda GX120T2, 4-stroke, OHV, single cylinder	Honda GX160T2, 4-stroke, OHV, single cylinder
<b>Displacement</b>	163 cc (9.95 CID)	270 cc (16.5 CID)	389 cc (23.7 CID)	118 cc (7.2 CID)	163 cc (9.95 CID)
<b>Lubrication System</b>	Forced splash	Forced spray	Forced spray	Forced splash	Forced splash
<b>Governor</b>	Mechanical centrifugal	Mechanical centrifugal	Mechanical centrifugal	Mechanical centrifugal	Mechanical centrifugal
<b>Starting System</b>	Recoil starter	Recoil starter	Recoil starter	Recoil starter	Recoil starter
<b>Fuel Tank Capacity</b>	3.1 litres (0.68 Imp. gal.)	5.3 litres (1.17 Imp. gal.)	6.1 litres (1.34 Imp. gal.)	2 litres (0.44 Imp. gal.)	3.1 litres (0.68 Imp. gal.)
<b>Oil Alert™ System</b>	Standard	Standard	Standard	N/A	N/A
<b>Length</b>	62 cm (24.4 in.)	66 cm (26 in.)	73.5 cm (28.9 in.)	41.5 cm (16.3 in.)	42.5 cm (16.7 in.)
<b>Width</b>	46.0 cm (18.1 in.)	49.5 cm (19.5 in.)	53.5 cm (21.1 in.)	36 cm (14.2 in.)	37.5 cm (14.8 in.)
<b>Height</b>	46.5 cm (18.3 in.)	51.5 cm (20.3 in.)	56.5 cm (22.2 in.)	40.5 cm (15.9 in.)	40.5 cm (15.9 in.)
<b>Dry Weight</b>	47 kg (104 lb.)	61 kg (134 lb.)	78 kg (172 lb.)	22 kg (48.5 lb.)	23.5 kg (51.8 lb.)



**BATTLEFIELD** **CAT** Rental

**1-800-RENT-CAT**  
[www.BattlefieldEquipment.ca](http://www.BattlefieldEquipment.ca)

 Honda Canada Outdoors  @HondaPowersports-OutdoorCanada  @HondaOutdoors

For optimum performance and safety, please read your owner's manual thoroughly before operating your Honda Power Equipment product. Specifications subject to change without notice. Models and colours may not be exactly as shown. Errors and omissions excepted. See your Honda Power Equipment retailer or [honda.ca](http://honda.ca) for full details. TMs - Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd.

Printed in Canada, 2026.

**HONDA**  
**POWER EQUIPMENT**  
[powerequipment.honda.ca](http://powerequipment.honda.ca)