


2600 Series Hazardous Location LED Hand Lamps

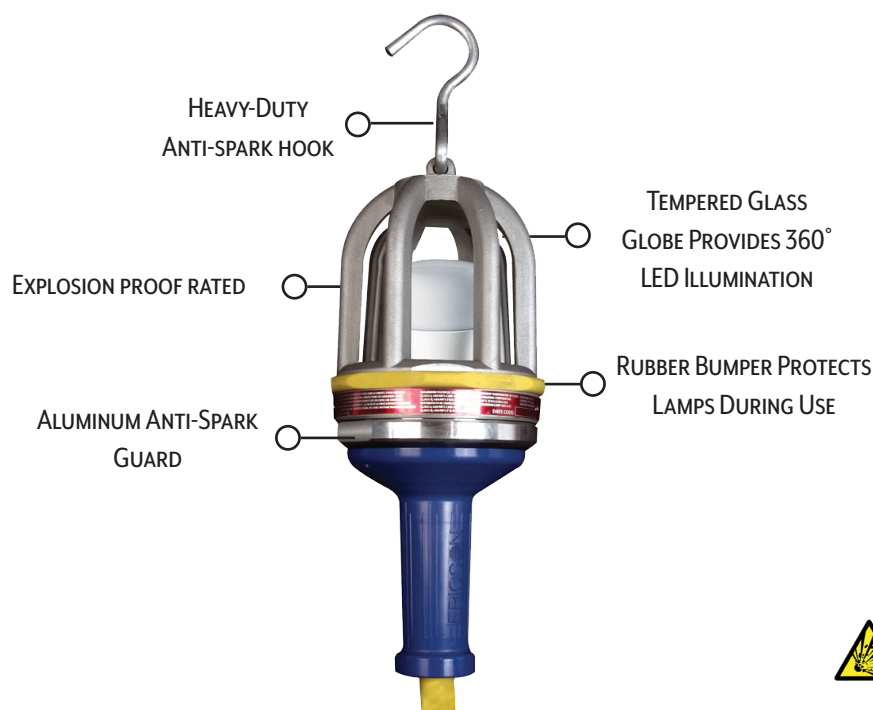

Standard Features:

- cETLus listed
- Class I & II Div I & 2, Groups C, D, F & G
- NEMA 4X Rated, and Wet location rated
- Class I, Div I style plug available by appending -XP to non-blunt part numbers
- 2600 Series hand lamps are available in 25, 50 and 100 ft. cord lengths
- Aluminum anti-spark guard
- Non-conductive, high-impact glass reinforced handle
- Designed for applications requiring weather resistant or spark resistant construction
- Unique cord restraint seal system includes flex relief to provide superior water resistance
- Accommodates #16/3 to #14/3 types S, SO, ST or STO cords
- High-impact tempered glass globe threads directly into specially designed guard assembly
- Handle construction provides superior strength and high insulation properties
- Resistant to heat up to 200° F and withstands chemicals, acids and chipping
- Temp Rating -20°C to 40°C Ambient (T3C with 100 Watt Incandescent)

Applications:

- Waste / Water treatment
- Grain elevators
- Mining
- Oil refineries
- Coal Barns / Fuel storage
- Hazardous locations
- Aerospace
- Shipyards



Selection Guide:

Part Number ¹	Electrical Rating	Wattage	Cord Length / Cord Type	Bulb Type ²	Lumens	Plug	Low Voltage
2600-LED	120VAC	11 watts	None Hand Lamp Only	LED	800	None	No
2600-LED-L	12VAC	8 watts	None Hand Lamp Only	LED	850	None	Yes
2625-LED	120VAC	11 watts	25 ft. / #14/3 SOOW	LED	800	NEMA 5-15	No
2625-LED-L	12VAC	8 watts	25 ft. / #14/3 SOOW	LED	850	NEMA 5-15	Yes
2625-LED-XP	120VAC	11 watts	25 ft. / #14/3 SOOW	LED	800	Explosion Proof 5-15 Style	No

¹ - 2600 Series hand lamps are available in 25, 50 and 100 ft. cord lengths

² - All bulbs included with handlamps

Illustration Description:

1. Heavy-duty tempered glass globe resists breakage
2. Light weight alloy guard assembly
 - Unscrews from base for easy bulb changes
3. Rubber bumper protects against drops
4. LED Bulb
5. Grounding ring assures all metal parts are grounded
6. Single piece replaceable heavy-duty socket threads into base
7. Single molded drop body threads onto socket assembly
8. Screw terminals are color coded
9. Single hex set screw secures lamp body
10. Internal weather seal keeps connections dry
11. Low voltage transformer for "L" part numbers



Replacement Parts:

Replacement Part	Part Number
Handle	2603
Cord strain relief kit	2604
Replacement base & Socket assembly	2605
Guard & Globe Assembly	2610
11 watt 120VAC LED Lamp	SLBLED-60
7.3 watt 12VAC LED Lamp	SLBLED-12



Ericson Manufacturing Company
4323 Hamann Parkway
Willoughby, OH 44094, USA



1.800.374.2766
info@ericson.com
ericson.com
L1000508B